


# 48" Motorized Squeeze Roll Applicator

## Product Overview

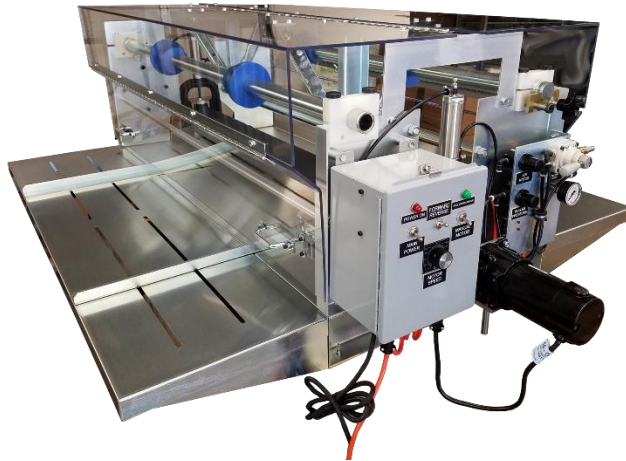

The MSRA-48 is designed for continuous machine application of sheeting and films with pressure sensitive adhesive to flat panels. Essentially, it is a HSRA-48 which has been converted to a motorized applicator.

The MSRA-48 consists of a rubber coated top roller and a steel lower roller mounted in a frame. It includes both an unwind roll and a take-up roll.

## Specifications

Weight	620 lbs.
Dimensions	<input type="checkbox"/> Main table: 66"L X 24"W X 20"H <input type="checkbox"/> Extension table: 54"L X 14"W X 4"H
Maximum Sign Size	Up to 50" wide and 2.25" thick
Construction	<input type="checkbox"/> Anodized aluminum end frames <input type="checkbox"/> Rubber coated steel upper roller <input type="checkbox"/> Steel lower roller <input type="checkbox"/> 1 main table and 2 extension tables bolted together <input type="checkbox"/> Variable Speed DC Motor Drive <input type="checkbox"/> Pneumatic Roller Lift <input type="checkbox"/> Pneumatic Motor Controlled Liner Take-up <input type="checkbox"/> Foot Switch Operation <input type="checkbox"/> Safety covers with switches to assure safe operation <input type="checkbox"/> Voltage requirements: 110 VAC 60Hz <input type="checkbox"/> Does NOT include air compressor